

LED T8 GLASS TUBE (STANDARD SERIES)

EM TRONIK

DESCRIPTION

EM TRONIK BRAND

T8 LED GLASS TUBE

DIA. 26mm **G13** END CAP

85-265VAC 50/60Hz

MATERIAL / FINISH

HIGHLY TRANSPARENT GLASS TUBE

ALUMINIUM END CAP

HIGH EFFICIENCY CONTROL GEAR

SUPER BRIGHT LED SOURCE **SMD 2835**



SPECIFICATION

INPUT POWER 85-265VAC 50/60 Hz

ENERGY SAVING > 75%

50,000 HOURS AVERAGE LIFE

TOTAL HARMONIC DISTORTION (THD) < 10%

THIRD HARMONIC DISTORTION < 6%

POWER FACTOR (P.F.) > 0.9


COLOR RENDERING INDEX (Ra) > 80

LED TUBE BEAM ANGLE > 300 DEGREE

COLOR TEMPERATURE (K) 3000/3500/4000/6000K

UV AND IR FREE LOW HEAT RADIATION

WIRING DIAGRAM

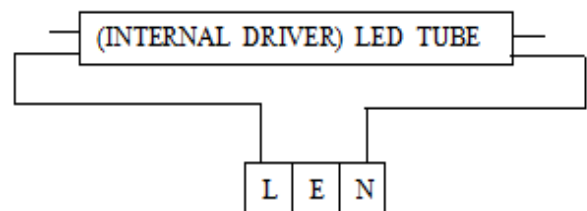

85-265VAC 50/60 Hz

APPLICATION

OFFICE, MEETING ROOM, HOSPITAL, SCHOOL, FACTORY, HOTEL, HOME AND INDOOR LIGHTING ETC.

CERTIFICATE

LVD

EN 60598-1 EN 60598-2-1 EN 60598-2-2 EN 62031

SAFETY

EN 61347-1 EN 61347-2-13

EMC

EN 55015 EN 61547 EN 61000-3-2 EN 61000-3-3

PHOTOBIOLOGY

EN 62471 EN 62493 EN 62560 EN 62778

RoHS

EN 60529 EN 61195

订货指南/ORDER GUIDE

MODEL	WATTAGE(W)	LUMINOUS FLEX(lm)	POWER FACTOR(P.F.)
EM-LED-T8-450	4W	540lm	>0.90
EM-LED-T8-600	6W	810lm	>0.93
EM-LED-T8-900	10W	1360lm	>0.93
EM-LED-T8-1050	12W	1630lm	>0.95
EM-LED-T8-1200	12.5 W	1700lm	>0.95
EM-LED-T8-1500	18W	2440lm	>0.95
EM-LED-T8-1800	21W	2850lm	>0.95

REMARKS

WARRANTY PERIOD : THREE (3) YEARS